

GSFC JPSS CMO
November 8, 2013
Released

**Joint Polar Satellite System (JPSS) Ground Project
Code 474
474-00078**

**Joint Polar Satellite System (JPSS)
Operational Algorithm Description
(OAD)
Document for VIIRS Gridded Surface
Albedo (GSA) Intermediate Products
(IP) Software
For Public Release**

The information provided herein does not contain technical data as defined in the International Traffic in Arms Regulations (ITAR) 22 CFC 120.10. This document has been approved For Public Release to the NOAA Comprehensive Large Array-data Stewardship System (CLASS).



**Goddard Space Flight Center
Greenbelt, Maryland**

National Aeronautics and
Space Administration

**Joint Polar Satellite System (JPSS)
Operational Algorithm Description (OAD) Document for
VIIRS Gridded Surface Albedo (GSA) Intermediate
Products (IP) Software
JPSS Electronic Signature Page**

Prepared By:

Bonnie Reed

JPSS Data Products and Algorithms EDR Lead (Electronic Approvals available online at https://jpssmis.gsfc.nasa.gov/mainmenu_dsp.cfm)

Approved By:

Eric Gottshall DPA Manager

(Electronic Approvals available online at https://jpssmis.gsfc.nasa.gov/mainmenu_dsp.cfm)

**Goddard Space Flight Center
Greenbelt, Maryland**

Preface

This document is under JPSS Ground Algorithm ERB configuration control. Once this document is approved, JPSS approved changes are handled in accordance with Class I and Class II change control requirements as described in the JPSS Configuration Management Procedures, and changes to this document shall be made by complete revision.

Any questions should be addressed to:

JPSS Configuration Management Office
NASA/GSFC
Code 474
Greenbelt, MD 20771

Change History Log

Revision	Effective Date	Description of Changes (Reference the CCR & CCB/ERB Approve Date)
Original	06/03/2011	This version incorporates 474-CCR-11-0094 which converts D39538, Operational Algorithm Description (OAD) Document for VIIRS Gridded Surface Albedo Intermediate Product (IP), Rev B, dated 06/09/2010 to a JPSS document, Rev -. This was approved by the JPSS Ground Algorithm ERB on June 3, 2011.
Revision A	01/18/2012	474-CCR-11-0275: This version baselines 474-00078, Joint Polar Satellite System (JPSS) Operational Algorithm Description (OAD) Document for VIIRS Gridded Surface Albedo (GSA) Intermediate Products (IP) Software, for the Mx 6 IDPS release. This CCR was approved by the JPSS Algorithm ERB on January 18, 2012.
Revision B	05/14/2013	474-CCR-13-0948: This version authorizes 474-00078, JPSS OAD Document for VIIRS GSA IP Software, for the Mx 7.0 IDPS release. Includes Raytheon PCR032720; 474-CCR-13-0916/ECR-ALG-0037: Update applicable OAD filenames/template/Rev/etc. for Mx7 Release.
Revision C	11/06/2013	474-CCR-13-1288: This version authorizes 474-00078, JPSS OAD Document for VIIRS GSA IP Software, for the Mx 8.0 IDPS release. Includes administrative changes authorized by interoffice memo and Raytheon PCR034590; OAD: PRO: 474-CCR-13-1031: 17-Day LSA GIP "Scale Out of Bound" (DRs 7114, 7156), in section .2.1.2.1.



NATIONAL POLAR-ORBITING OPERATIONAL ENVIRONMENTAL SATELLITE SYSTEM (NPOESS)

OPERATIONAL ALGORITHM DESCRIPTION DOCUMENT FOR VIIRS GRIDDED SURFACE ALBEDO Intermediate Product (IP)

**SDRL No. S141
SYSTEM SPECIFICATION SS22-0096**

**RAYTHEON COMPANY
INTELLIGENCE AND INFORMATION SYSTEMS (IIS)
NPOESS PROGRAM
OMAHA, NEBRASKA**

**Copyright © 2004-2010
Raytheon Company
Unpublished Work
ALL RIGHTS RESERVED**

Portions of this work are the copyrighted work of Raytheon. However, other entities may own copyrights in this work. Therefore, the recipient should not imply that Raytheon is the only copyright owner in this work.

This data was developed pursuant to Contract Number F04701-02-C-0502 with the US Government under subcontract number 7600002744. The US Government's right in and to this copyrighted data are as specified in DFAR 252.227-7013, which was made part of the above contract

Northrop Grumman Space & Mission Systems Corp.
Space Technology
 One Space Park
 Redondo Beach, CA 90278



**Engineering & Manufacturing Development (EMD) Phase
 Acquisition & Operations Contract**

CAGE NO. 11982

**Operational Algorithm Description Document for
 VIIRS Gridded Surface Albedo IP**

Document Date: Oct 13, 2010

**Document Number: D39538
 Revision: C1**

PREPARED BY:

 Alain Sei *Date*
 AM&S Gridded Surf Alb IP Lead

 Paul D. Siebels *Date*
 IDPS PRO SW Manager

ELECTRONIC APPROVAL SIGNATURES:

 Roy Tsugawa *Date*
 A&DP Lead & ACCB Chair

 Stephen E. Ellefson *Date*
 IDPS Processing SI Lead

 Bob Hughes *Date*
 A&DP Deputy & ARB Chair

Prepared by
Northrop Grumman Space Technology
 One Space Park
 Redondo Beach, CA 90278

Prepared for
Department of the Air Force
 NPOESS Integrated Program Office
 C/O SMC/CIK
 2420 Vela Way, Suite 1467-A8
 Los Angeles AFB, CA 90245-4659

Under

Contract No. F04701-02-C-0502

This document has been identified per the NPOESS Common Data Format Control Book – External Volume 5 Metadata, D34862-05, Appendix B as a document to be provided to the NOAA Comprehensive Large Array-data Stewardship System (CLASS) via the delivery of NPOESS Document Release Packages to CLASS.

Northrop Grumman Space & Mission Systems Corp. Space Technology One Space Park Redondo Beach, CA 90278		 	
Revision/Change Record		Document Number	D39538
Revision	Document Date	Revision/Change Description	Pages Affected
---	9-17-04	Initial Release.	All
A1	10-12-07	Implemented Tech Memo NP-EMD.2007.510.0031 updates for B1.5, new logo, removed Unit Test section. Delivered to NGST.	All
A2	11-6-07	Corrected Table 9.	All
A3	9-19-08	Reformatted to conform to template D41851.	All
A4	10-29-08	Prepared for TIM/ACCB.	All
A	12-10-08	Addressed TIM comments. ECR A-179.	All
B1	12-01-09	Addressed RFA Nos 236 and 552 (resulting in no OAD changes), and updated subcontract number.	Title pgs
B2	5-10-10	Incorporated TM 2010.510.0038	Rev Hist. & Tables 1 & 2
B	4-28-10 6-9-10	Prepared for TIM/ARB Incorporated ECR A307 and returned to ACCB	Tables 1 & 2
C1	10-13-10	Updated due to document convergence	All

Table of Contents

1.0 INTRODUCTION..... 1

 1.1 Objective..... 1

 1.2 Scope 1

 1.3 References 1

 1.3.1 Document References 1

 1.3.2 Source Code References 3

2.0 ALGORITHM OVERVIEW 4

 2.1 Gridded Surface Albedo Description 5

 2.1.1 Interfaces 5

 2.1.1.1 Inputs 5

 2.1.1.2 Outputs..... 5

 2.1.2 Algorithm Processing..... 6

 2.1.2.1 Main Module - ProGipViirsGridToGridLSA.cpp..... 7

 2.1.2.2 PerformInversion() 7

 2.1.2.3 performAlbedoFullInversion()..... 8

 2.1.2.4 performAlbedoMagnitudeInversion()..... 9

 2.1.2.5 calculateNbar()..... 9

 2.1.2.6 calculateBlackAndWhiteSkyAlbedo()..... 9

 2.1.3 Graceful Degradation..... 9

 2.1.3.1 Graceful Degradation Inputs 9

 2.1.3.2 Graceful Degradation Processing 9

 2.1.3.3 Graceful Degradation Outputs 9

 2.1.4 Exception Handling 10

 2.1.5 Data Quality Monitoring 10

 2.1.6 Computational Precision Requirements 10

 2.1.7 Algorithm Support Considerations 10

 2.1.8 Assumptions and Limitations 10

 2.1.8.1 Assumptions..... 10

 2.1.8.2 Limitations 10

3.0 GLOSSARY/ACRONYM LIST 11

 3.1 Glossary 11

 3.2 Acronyms..... 14

4.0 OPEN ISSUES 15

List of Figures

Figure 1. Surface Albedo IP Processing Chain..... 5
Figure 2. doProcessing Logic Flow..... 6
Figure 3. PerformInversion() Logic Flow..... 8

List of Tables

Table 1. Reference Documents 1
Table 2. Source Code References..... 3
Table 3. Glossary 11
Table 4. Acronyms 14
Table 5. TBX Table 15

1.0 INTRODUCTION

1.1 Objective

The purpose of the Operational Algorithm Description (OAD) document is to express, in computer-science terms, the remote sensing algorithms that produce the National Polar-Orbiting Operational Environmental Satellite System (NPOESS) end-user data products. These products are individually known as Raw Data Records (RDRs), Temperature Data Records (TDRs), Sensor Data Records (SDRs) and Environmental Data Records (EDRs). In addition, any Intermediate Products (IPs) produced in the process are also described in the OAD.

The science basis of an algorithm is described in a corresponding Algorithm Theoretical Basis Document (ATBD). The OAD provides a software description of that science as implemented in the operational ground system -- the Data Processing Element (DPE).

The purpose of an OAD is two-fold:

1. Provide initial implementation design guidance to the operational software developer.
2. Capture the “as-built” operational implementation of the algorithm reflecting any changes needed to meet operational performance/design requirements.

An individual OAD document describes one or more algorithms used in the production of one or more data products. There is a general, but not strict, one-to-one correspondence between OAD and ATBD documents.

1.2 Scope

Nominally, there is at least one Operational Algorithm Document (OAD) per EDR package. The scope of this document is limited to the description of the operational implementation of the algorithm(s) required to create the VIIRS Gridded Surface Albedo IP software.

The scope of this document is limited to the description of the core operational algorithm required to create the VIIRS Gridded Surface Albedo IP. The theoretical basis for this algorithm is described in Section 3.3 of the Surface Albedo Algorithm Theoretical Basis document ATBD, 474-00040.

1.3 References

1.3.1 Document References

The science and system engineering documents relevant to the algorithms described in this OAD are listed in Table 1.

Table 1. Reference Documents

Document Title	Document Number/Revision	Revision Date
Visible/Infrared/Imager/ Radiometer Suite (VIIRS) Land Module Software Architecture Document	Y2474 Ver. 5 Rev. 7	May 2002
VIIRS Surface Land Module Interface Control Document	Y3279 Ver. 5 Rev. 3	May 2002
VIIRS Surface Albedo IP Unit Level Detailed Design	Y2483 Ver. 5 Rev. 4	24 May 2004

Document Title	Document Number/Revision	Revision Date
Document		
VIIRS Gridding/Regridding Detailed Design Document	Y3246 Ver. 5 Rev. 6	17 Sep 2004
Surface Albedo Algorithm Theoretical Basis document ATBD	474-00040	Latest
JPSS Environmental Data Record (EDR) Production Report for NPP	474-00012	Latest
JPSS Environmental Data Record (EDR) Interdependency Report (IR) for NPP	474-00007	Latest
JPSS Data Format Control Book - Internal Volume III – Retained Intermediate Product Formats (IDFCB) – Block 1.2.2	474-00020-03-B0122 IDFCB Vol III	Latest
JPSS Data Format Control Book - Internal Volume III – Retained Intermediate Product Formats (IDFCB) – Block 1.2.3	474-00020-03-B0123 IDFCB Vol III	Latest
NPP Mission Data Format Control Book and App A (MDFCB)	429-05-02-42_MDFCB	Latest
JPSS Common Data Format Control Book - External - Block 1.2.2 (All Volumes)	474-00001-01-B0122 CDFCB-X Vol I 474-00001-02-B0122 CDFCB-X Vol II 474-00001-03-B0122 CDFCB-X Vol III 474-00001-04-01-B0122 CDFCB-X Vol IV Part 1 474-00001-04-02-B0122 CDFCB-X Vol IV Part 2 474-00001-04-03-B0122 CDFCB-X Vol IV Part 3 474-00001-04-04-B0122 CDFCB-X Vol IV Part 4 474-00001-05-B0122 CDFCB-X Vol V 474-00001-06-B0122 CDFCB-X Vol VI 474-00001-08-B0122 CDFCB-X Vol VIII	Latest
JPSS Common Data Format Control Book - External - Block 1.2.3 (All Volumes)	474-00001-01-B0123 CDFCB-X Vol I 474-00001-02-B0123 CDFCB-X Vol II 474-00001-03-B0123 CDFCB-X Vol III 474-00001-04-01-B0123 CDFCB-X Vol IV Part 1 474-00001-04-02-B0123 CDFCB-X Vol IV Part 2 474-00001-04-03-B0123 CDFCB-X Vol IV Part 3 474-00001-04-04-B0123 CDFCB-X Vol IV Part 4 474-00001-05-B0123 CDFCB-X Vol V 474-00001-06-B0123 CDFCB-X Vol VI 474-00001-08-B0123 CDFCB-X Vol VIII	Latest
NPP Command and Telemetry (C&T) Handbook	D568423 Rev. C	30 Sep 2008
JPSS CGS Data Processor Inter-subsystem Interface Control Document (DPIS ICD) Vol I – IV	IC60917-IDP-002	Latest
Operational Algorithm Description Document for Gridding/Granulation (G/G) and VIIRS Gridded Intermediate Products (GIP)	474-00075	Latest
Joint Polar Satellite System (JPSS) Program Lexicon	470-00041	Latest

Document Title	Document Number/Revision	Revision Date
IDPS Processing SI Common IO Design	DD60822-IDP-011 Rev. A	21 Jun 2007
NGST/SE technical memo – NPP_Land_Surface_Albedo_OAD_Update	NP-EMD.2007.510.0031	26 Apr 2007
NGAS/A&DP technical memo – Roujean kernel correction for the VIIRS gridded surface albedo IP	NP-EMD.2010.510.0038	05 May 2010

1.3.2 Source Code References

The science and operational code and associated documentation relevant to the algorithms described in this OAD are listed in Table 2.

Table 2. Source Code References

Reference Title	Reference Tag/Revision	Revision Date
VIIRS GSA IP Science-grade Software includes TM 2007.510.0031	ISTN_VIIRS_NGST_4.5 (ECR-A123A)	23 May 2007
VIIRS GSA IP Operational Software includes implementation of TM 2007.510.0031	B1.5 (OAD Rev A1)	12 Oct 2007
ACCB	ECR A179 (OAD Rev A)	10 Dec 2008
ACCB (no code updates) (not approved, then updated by TM 2010.510.0038	OAD Rev B	28 Apr 2010
NGAS/A&DP technical memo – Roujean kernel correction for the VIIRS gridded surface albedo IP	NP-EMD.2010.510.0038 Build Sensor Characterization SC-11 (OAD Rev B2)	10 May 2010
ACCB (Return trip to ACCB for Rev B)	OAD Rev B	09 Jun 2010
Convergence Update (No code updates)	OAD Rev C1	13 Oct 2010
OAD transitioned to JPSS Program – this table is no longer updated.		

2.0 ALGORITHM OVERVIEW

The purpose of the Surface Albedo IP algorithm is to determine the BRDF (Bidirectional Reflectance Distribution Function) for each 1km x 1km Earth Gridded Pixel as well as the following associated quantities:

- BRDF Coefficients Inverted from the Gridded Daily Surface Reflectance IP data,
- Nadir BRDF-Adjusted Reflectance Values (NBAR), at 1km resolution,
- Mean Solar-Zenith Angle of the Reflectance Data,
- White-Sky and Black-Sky Spectral Albedo values, and
- Surface Albedo Quality Flags.

Gridded daily surface reflectance, LUT and archetypal historical BRDF shapes are used to determine which BRDF model best explains the data. Four different criteria are used to determine the best BRDF model. These are: the minimization of the root mean square error (RMSE), the minimization of the BRDF coefficient variance, the minimization of the white-sky albedo variance, and the RMSE Heritage. The Surface Albedo IP processing chain is shown in Figure 1.

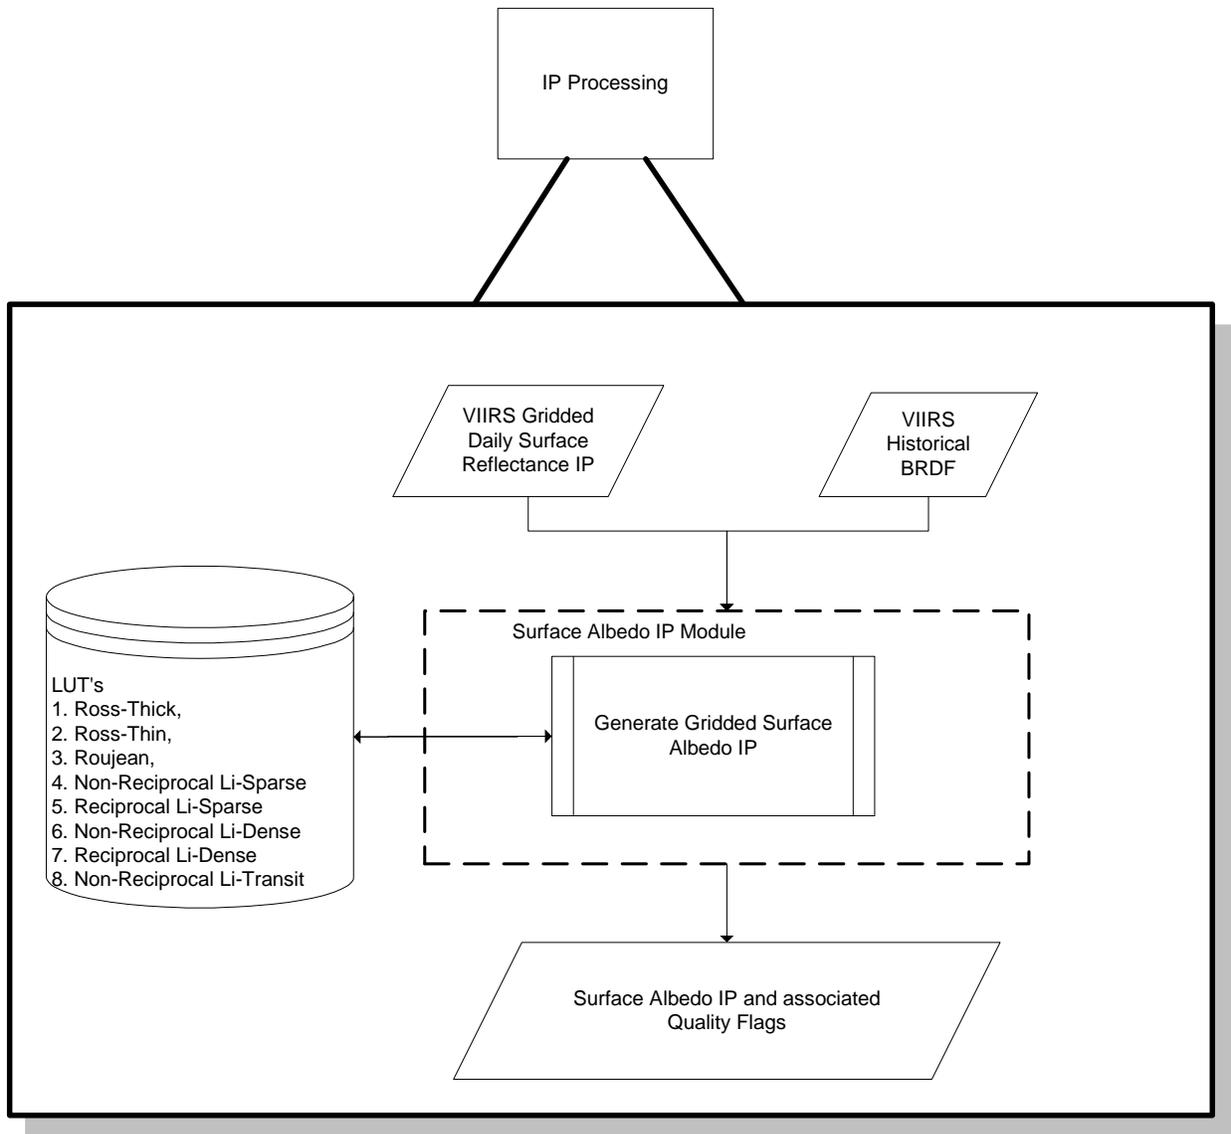


Figure 1. Surface Albedo IP Processing Chain

2.1 Gridded Surface Albedo Description

2.1.1 Interfaces

2.1.1.1 Inputs

See the Land Surface Albedo GridToGrid Inputs in the Operational Algorithm Description Document for Gridding/Granulation (G/G) and VIIRS Gridded Intermediate Products (GIP), 474-00075.

2.1.1.2 Outputs

See the Land Surface Albedo GridToGrid Outputs in the Operational Algorithm Description Document for Gridding/Granulation (G/G) and VIIRS Gridded Intermediate Products (GIP), 474-00075.

2.1.2 Algorithm Processing

The gridded Surface Albedo IP objective is to produce the BRDF for each 1km x 1km Earth Gridded Pixel and associated quantities; the output consists of BRDF Coefficients, Nadir BRDF-Adjusted Reflectance Values (NBAR), Mean Solar-Zenith Angle of the Reflectance Data, White-Sky, Black-Sky Spectral Albedo values at mean solar zenith angle and Surface Albedo Quality Flags. Gridded daily surface reflectance, LUT and archetypal historical BRDF shapes are used to determine which BRDF model best explains the data. Four different criteria are used to determine the best BRDF model. These are the minimization of the root mean square error (RMSE), the minimization of the BRDF coefficient variance, the minimization of the white-sky albedo variance, and the RMSE Heritage. Refer to the Surface Albedo Algorithm Theoretical Basis document ATBD, 474-00040 for equations used within this algorithm/OAD.

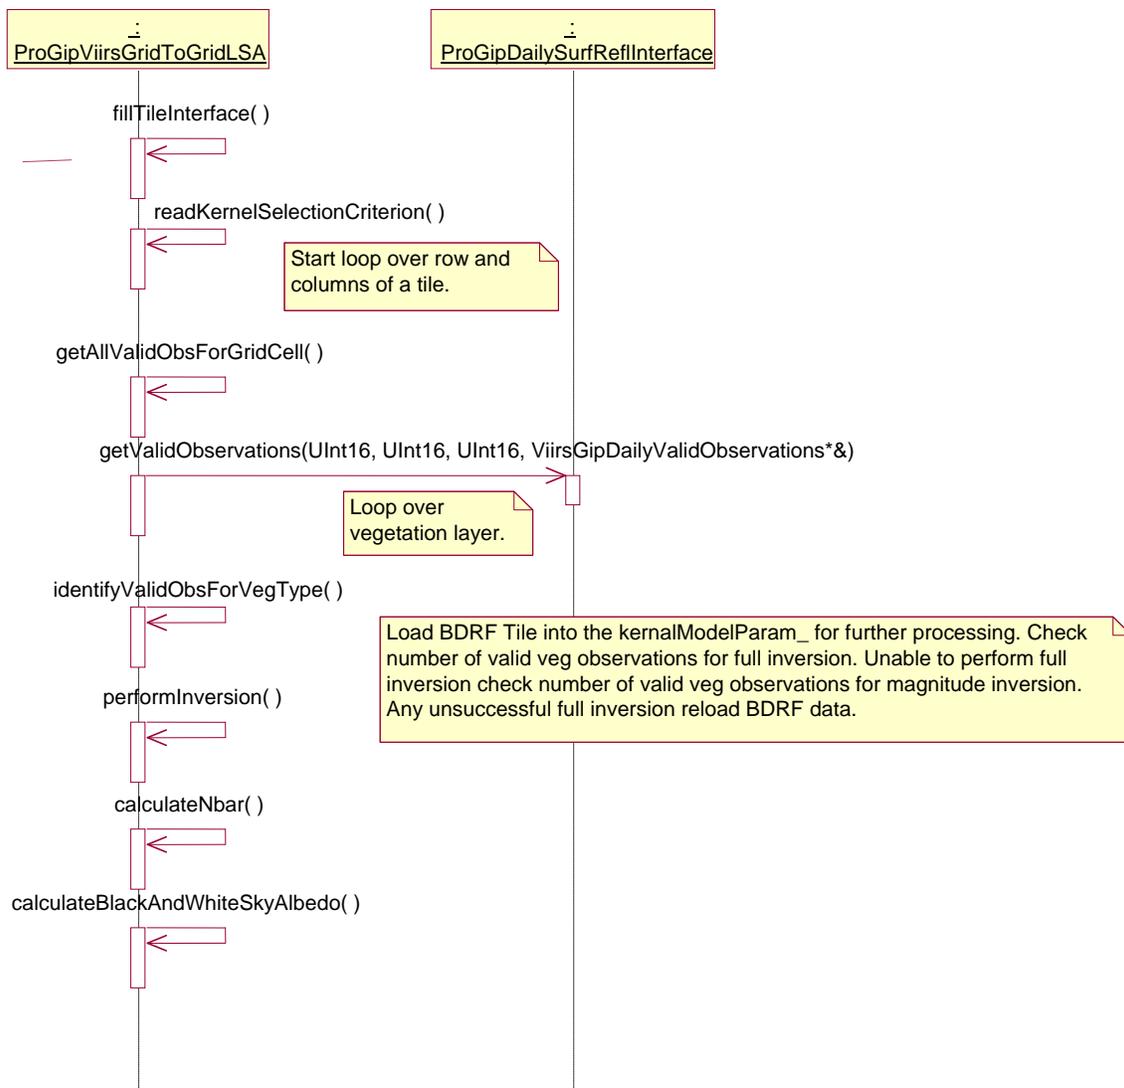


Figure 2. doProcessing Logic Flow

2.1.2.1 Main Module - ProGipViirsGridToGridLSA.cpp

The main module calls the doProcessing function for the Gridded surface albedo IP algorithm. As depicted in Figure 2, one grid cell of data is ingested at a time.

After a call to fillTileInterface() to populate the tile interfaces: the readKernelSelectionCriterion() is called to read the xml configuration file and determine which type of kernel selection criterion should be used to process these grid cells, getAllValidObsForGridCell() goes out and retrieves all the observations for a particular grid cell, getValidObservations() retrieves all the valid observations, identifyValidObsForVegType() breaks the valid observations up by vegetation type and processes each vegetation type for that grid cell, then performInversion() computes the BRDF Model according to the inversion criterion selected in the input configuration file. The four inversion criteria available are: minimization of the root mean square error (RMSE), minimization of the BRDF coefficients variance, minimization of the White-Sky albedo variance, and the RMSE Heritage. They are selected by setting the parameter KernelSelectionCriterion in the input file to: 1 (RMSE), 2 (Coefficients variance), 3 (White-Sky albedo variance), or 4 (RMSE heritage running the MODIS BRDF Kernels, Ross Thick Li Sparse Reciprocal). Then calculateNbar() and calculateBlackAndWhiteSkyAlbedo() are performed, when determined they are needed. Once the BRDF model and associated quantities are computed then the results are written in the output file.

Retrieval quality flags are set in the outputs, with poor retrieval quality being set for the following conditions:

- Magnitude inversion was performed.
- Full inversion produced coefficients out of range.
- Full inversion produced error exceeding minimum threshold.

2.1.2.2 PerformInversion()

This routine is the core of the algorithm as it performs the full inversion of the BRDF when possible; or the magnitude inversion when the full inversion is not possible, or copies the archetypal shape when possible if both inversions failed. The logic implemented is described in Figure 3.

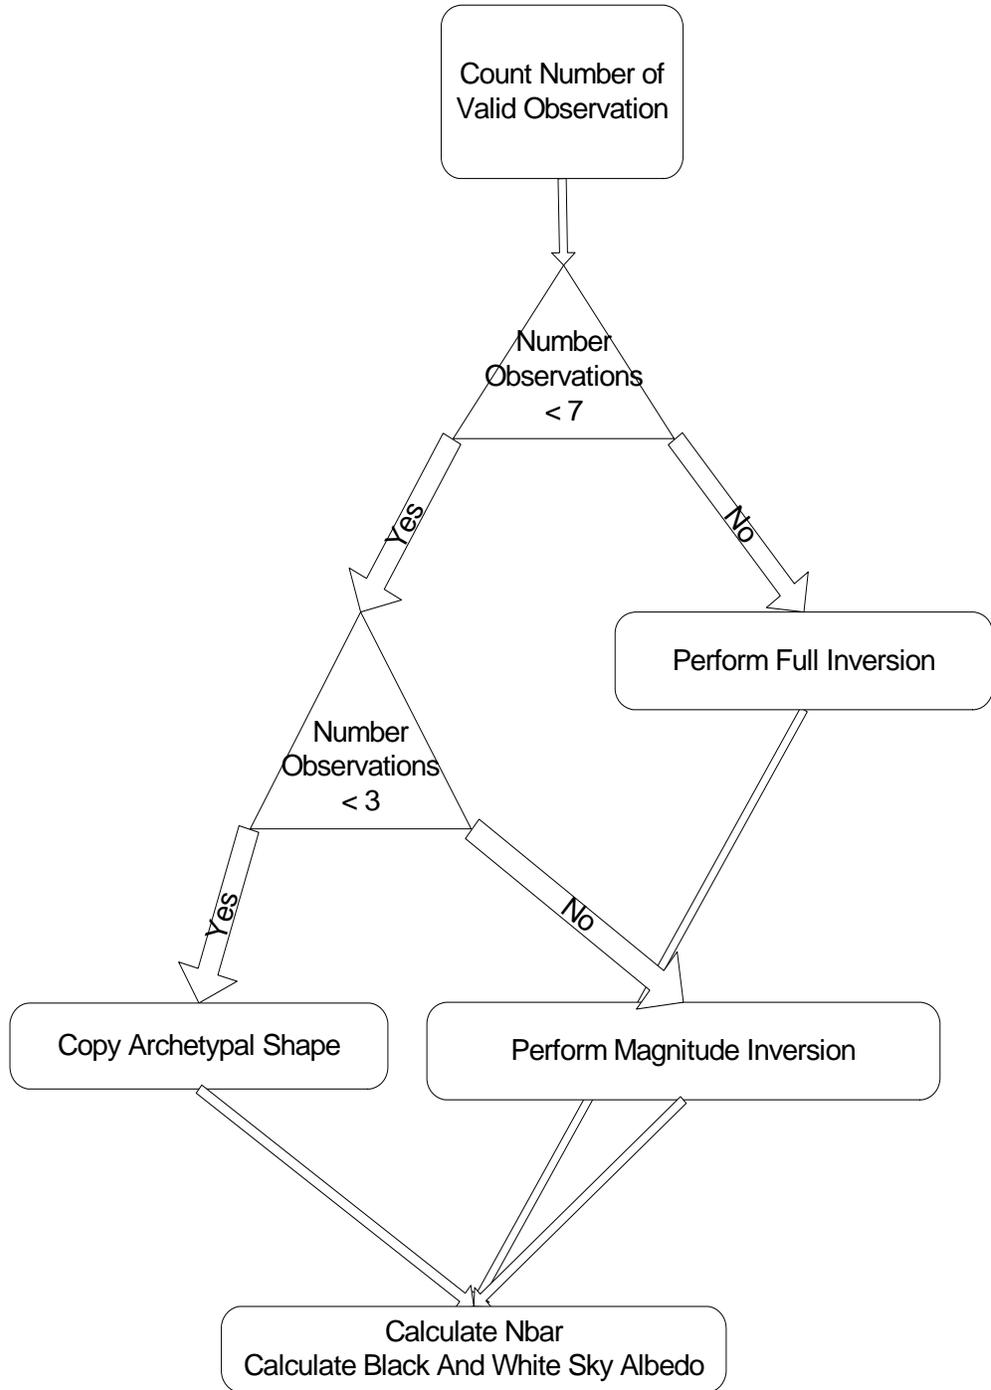


Figure 3. PerformInversion() Logic Flow

2.1.2.3 performAlbedoFullInversion()

This routine performs the full BRDF inversion if enough data is available, currently seven observations. This is a configurable parameter set up by the variable FullInversionMinCount given in the input configuration file. For the selected inversion

criterion, the best model is the model with the smallest error (RMSE, coefficient variance, white-sky albedo variance, or RMSE Heritage).

2.1.2.4 performAlbedoMagnitudeInversion()

When a full BRDF inversion is not possible, a magnitude (one dimensional inversion) is attempted if enough data is available. The number of available data is set to three at this time, but is configurable by the parameter `MagInversionMinCount` in the input file. The unknown scaling parameter is derived from the data and the available archetypal shape previously stored for that cell.

2.1.2.5 calculateNbar()

Once the model is determined, the Nadir BRDF Adjusted Reflectance (NBAR) can easily be evaluated. It is given by the value of the BRDF model evaluated at the mean solar zenith angle, for Nadir viewing geometry, i.e. for the sensor zenith angle equal to zero and the relative azimuth also equal to zero (principal plane). The mean Solar Zenith angle is computed and stored in this routine for use in the computation of the Black-Sky albedo.

2.1.2.6 calculateBlackAndWhiteSkyAlbedo()

Once the BRDF model is obtained, for the selected criterion and by one if the available inversion (full, magnitude or look up of archetypal shape), then the Black-Sky and White-Sky Albedoes can easily be computed from stored LUT values. The White-Sky albedoes, for each of the 12 available kernels, are stored in the corresponding LUT as the first item with zenith angle equal to -9999.99 . For instance, the Ross-Thick white-Sky albedo according to the LUT `hk_Ross_Thick.lut` is equal to 0.18918039.

The Black-Sky albedo is evaluated at the mean solar zenith angle by interpolation of the LUT values at the current mean solar zenith angle.

2.1.3 Graceful Degradation

2.1.3.1 Graceful Degradation Inputs

There is one case where input graceful degradation is indicated in the Gridded Surface Albedo IP.

1. An input retrieved for the algorithm had its `N_Graceful_Degradation` metadata field set to YES (propagation).

2.1.3.2 Graceful Degradation Processing

None.

2.1.3.3 Graceful Degradation Outputs

None.

2.1.4 Exception Handling

Method return values are tested for failure flags. If a method does fail, the failure is passed up the call stack and reported in the algorithm's output log.

2.1.5 Data Quality Monitoring

No data quality monitoring is performed for this algorithm's outputs.

2.1.6 Computational Precision Requirements

Calculations are performed using a mix of 32 and 64 bit floating point values.

2.1.7 Algorithm Support Considerations

None.

2.1.8 Assumptions and Limitations

2.1.8.1 Assumptions

Daily gridded surface reflectance IP files are required as inputs as well as archetypal BRDF shapes.

2.1.8.2 Limitations

None.

3.0 GLOSSARY/ACRONYM LIST

3.1 Glossary

Table 3 contains terms most applicable for this OAD.

Table 3. Glossary

TERM	DESCRIPTION
Algorithm	A formula or set of steps for solving a particular problem. Algorithms can be expressed in any language, from natural languages like English to mathematical expressions to programming languages like FORTRAN. On NPOESS, an algorithm consists of: <ol style="list-style-type: none"> 1. A theoretical description (i.e., science/mathematical basis) 2. A computer implementation description (i.e., method of solution) 3. A computer implementation (i.e., code)
Algorithm Configuration Control Board (ACCB)	Interdisciplinary team of scientific and engineering personnel responsible for the approval and disposition of algorithm acceptance, verification, development and testing transitions. Chaired by the Algorithm Implementation Process Lead, members include representatives from IWPTB, Systems Engineering & Integration IPT, System Test IPT, and IDPS IPT.
Algorithm Verification	Science-grade software delivered by an algorithm provider is verified for compliance with data quality and timeliness requirements by Algorithm Team science personnel. This activity is nominally performed at the IWPTB facility. Delivered code is executed on compatible IWPTB computing platforms. Minor hosting modifications may be made to allow code execution. Optionally, verification may be performed at the Algorithm Provider's facility if warranted due to technical, schedule or cost considerations.
Ancillary Data	Any data which is not produced by the NPOESS System, but which is acquired from external providers and used by the NPOESS system in the production of NPOESS data products.
Auxiliary Data	Auxiliary Data is defined as data, other than data included in the sensor application packets, which is produced internally by the NPOESS system, and used to produce the NPOESS deliverable data products.
EDR Algorithm	Scientific description and corresponding software and test data necessary to produce one or more environmental data records. The scientific computational basis for the production of each data record is described in an ATBD. At a minimum, implemented software is science-grade and includes test data demonstrating data quality compliance.
Environmental Data Record (EDR)	<p><i>[IORD Definition]</i> Data record produced when an algorithm is used to convert Raw Data Records (RDRs) to geophysical parameters (including ancillary parameters, e.g., cloud clear radiation, etc.).</p> <p><i>[Supplementary Definition]</i> An Environmental Data Record (EDR) represents the state of the environment, and the related information needed to access and understand the record. Specifically, it is a set of related data items that describe one or more related estimated environmental parameters over a limited time-space range. The parameters are located by time and Earth coordinates. EDRs may have been resampled if they are created from multiple data sources with different sampling patterns. An EDR is created from one or more NPOESS SDRs or EDRs, plus ancillary environmental data provided by others. EDR metadata contains references to its processing history, spatial and temporal coverage, and quality.</p>
Model Validation	The process of determining the degree to which a model is an accurate representation of the real-world from the perspective of the intended uses of the model. [Ref.: DoDD 5000.59-DoD Modeling and Simulation Management]
Model Verification	The process of determining that a model implementation accurately represents the developer's conceptual description and specifications. [Ref.: DoDD 5000.59-DoD Modeling and Simulation Management]
Operational Code	Verified science-grade software, delivered by an algorithm provider and verified by IWPTB, is developed into operational-grade code by the IDPS IPT.

TERM	DESCRIPTION
Operational-Grade Software	Code that produces data records compliant with the System Specification requirements for data quality and IDPS timeliness and operational infrastructure. The software is modular relative to the IDPS infrastructure and compliant with IDPS application programming interfaces (APIs) as specified for TDR/SDR or EDR code.
Raw Data Record (RDR)	<p><i>[IORD Definition]</i></p> <p>Full resolution digital sensor data, time referenced and earth located, with absolute radiometric and geometric calibration coefficients appended, but not applied, to the data. Aggregates (sums or weighted averages) of detector samples are considered to be full resolution data if the aggregation is normally performed to meet resolution and other requirements. Sensor data shall be unprocessed with the following exceptions: time delay and integration (TDI), detector array non-uniformity correction (i.e., offset and responsivity equalization), and data compression are allowed. Lossy data compression is allowed only if the total measurement error is dominated by error sources other than the data compression algorithm. All calibration data will be retained and communicated to the ground without lossy compression.</p> <p><i>[Supplementary Definition]</i></p> <p>A Raw Data Record (RDR) is a logical grouping of raw data output by a sensor, and related information needed to process the record into an SDR or TDR. Specifically, it is a set of unmodified raw data (mission and housekeeping) produced by a sensor suite, one sensor, or a reasonable subset of a sensor (e.g., channel or channel group), over a specified, limited time range. Along with the sensor data, the RDR includes auxiliary data from other portions of NPOESS (space or ground) needed to recreate the sensor measurement, to correct the measurement for known distortions, and to locate the measurement in time and space, through subsequent processing. Metadata is associated with the sensor and auxiliary data to permit its effective use.</p>
Retrieval Algorithm	A science-based algorithm used to 'retrieve' a set of environmental/geophysical parameters (EDR) from calibrated and geolocated sensor data (SDR). Synonym for EDR processing.
Science Algorithm	The theoretical description and a corresponding software implementation needed to produce an NPP/NPOESS data product (TDR, SDR or EDR). The former is described in an ATBD. The latter is typically developed for a research setting and characterized as "science-grade".
Science Algorithm Provider	Organization responsible for development and/or delivery of TDR/SDR or EDR algorithms associated with a given sensor.
Science-Grade Software	Code that produces data records in accordance with the science algorithm data quality requirements. This code, typically, has no software requirements for implementation language, targeted operating system, modularity, input and output data format or any other design discipline or assumed infrastructure.
SDR/TDR Algorithm	Scientific description and corresponding software and test data necessary to produce a Temperature Data Record and/or Sensor Data Record given a sensor's Raw Data Record. The scientific computational basis for the production of each data record is described in an Algorithm Theoretical Basis Document (ATBD). At a minimum, implemented software is science-grade and includes test data demonstrating data quality compliance.
Sensor Data Record (SDR)	<p><i>[IORD Definition]</i></p> <p>Data record produced when an algorithm is used to convert Raw Data Records (RDRs) to calibrated brightness temperatures with associated ephemeris data. The existence of the SDRs provides reversible data tracking back from the EDRs to the Raw data.</p> <p><i>[Supplementary Definition]</i></p> <p>A Sensor Data Record (SDR) is the recreated input to a sensor, and the related information needed to access and understand the record. Specifically, it is a set of incident flux estimates made by a sensor, over a limited time interval, with annotations that permit its effective use. The environmental flux estimates at the sensor aperture are corrected for sensor effects. The estimates are reported in physically meaningful units, usually in terms of an angular or spatial and temporal distribution at the sensor location, as a function of spectrum, polarization, or delay, and always at full resolution. When meaningful, the flux is also associated with the point on the Earth geoid from which it apparently originated. Also, when meaningful, the sensor flux is converted to an equivalent top-of-atmosphere (TOA) brightness. The associated metadata includes a record of the processing and sources from which the SDR was created, and other information needed to understand the data.</p>

TERM	DESCRIPTION
Temperature Data Record (TDR)	<p><i>[IORD Definition]</i> Temperature Data Records (TDRs) are geolocated, antenna temperatures with all relevant calibration data counts and ephemeris data to revert from T-sub-a into counts.</p> <p><i>[Supplementary Definition]</i> A Temperature Data Record (TDR) is the brightness temperature value measured by a microwave sensor, and the related information needed to access and understand the record. Specifically, it is a set of the corrected radiometric measurements made by an imaging microwave sensor, over a limited time range, with annotation that permits its effective use. A TDR is a partially-processed variant of an SDR. Instead of reporting the estimated microwave flux from a specified direction, it reports the observed antenna brightness temperature in that direction.</p>

3.2 Acronyms

Table 4 contains terms most applicable for this OAD.

Table 4. Acronyms

TERM	DESCRIPTION
AM&S	Algorithms, Models & Simulations
API	Application Programming Interfaces
ARP	Application Related Product
CDFCB-X	Common Data Format Control Book - External
DMS	Data Management Subsystem
DPIS ICD	Data Processor Inter-subsystem Interface Control Document
DQTT	Data Quality Test Table
INF	Infrastructure
ING	Ingest
IP	Intermediate Product
LUT	Look-Up Table
MDFCB	Mission Data Format Control Book
QF	Quality Flag
SDR	Sensor Data Record
SI	International System of Units
TBD	To Be Determined
TBR	To Be Resolved
TOA	Top of the Atmosphere

4.0 OPEN ISSUES

Table 5. TBX Table

TBX ID	Title/Description	Resolution Date
None		