

**GSFC JPSS CMO  
April 05, 2016  
Released**

Effective Date: March 31, 2016  
Revision D

**Joint Polar Satellite System (JPSS) Ground Project  
Code 474  
474-00448-01-03**

**Joint Polar Satellite System (JPSS)  
Algorithm Specification Volume I:  
Software Requirement Specification (SRS)  
for the CrIS RDR/SDR**



National Aeronautics and  
Space Administration

**Goddard Space Flight Center  
Greenbelt, Maryland**

# **Joint Polar Satellite System (JPSS) Algorithm Specification Volume I: Software Requirement Specification (SRS) for the CrIS RDR/SDR JPSS Review/Approval Page**

**Prepared By:**

---

JPSS Ground System  
(Electronic Approvals available online at [https://jpssmis.gsfc.nasa.gov/frontmenu\\_dsp.cfm](https://jpssmis.gsfc.nasa.gov/frontmenu_dsp.cfm))

**Approved By:**

---

Robert M. Morgenstern Date  
JPSS Ground Project Mission Systems Engineering Manager  
(Electronic Approvals available online at [https://jpssmis.gsfc.nasa.gov/frontmenu\\_dsp.cfm](https://jpssmis.gsfc.nasa.gov/frontmenu_dsp.cfm))

**Approved By:**

---

Daniel S. DeVito Date  
JPSS Ground Project Manager  
(Electronic Approvals available online at [https://jpssmis.gsfc.nasa.gov/frontmenu\\_dsp.cfm](https://jpssmis.gsfc.nasa.gov/frontmenu_dsp.cfm))

**Goddard Space Flight Center  
Greenbelt, Maryland**

## Preface

This document is under JPSS Ground Project configuration control. Once this document is approved, JPSS approved changes are handled in accordance with Class I and Class II change control requirements as described in the JPSS Configuration Management Procedures, and changes to this document shall be made by complete revision.

Any questions should be addressed to:

JPSS Configuration Management Office  
NASA/GSFC  
Code 474  
Greenbelt, MD 20771

## Change History Log

Revision	Effective Date	Description of Changes (Reference the CCR & CCB/ERB Approve Date)
Rev -	August 8, 2013	This version incorporates 474-CCR-13-1110 which was approved by the JPSS Ground ERB on the effective day shown.
A	Jan 23, 2014	This version incorporates 474-CCR-13-1337 which was approved by the JPSS Ground ERB on the effective date shown.
A1	Oct 23, 2014	This version incorporates 474-CCR-14-2091 which was approved by the JPSS Ground ERB for CO10 on the effective date shown.
B	Nov 20, 2014	This version incorporates 474-CCR-14-1721, 474-CCR-14-1741, 474-CCR-14-1781, 474-CCR-14-1793, 474-CCR-14-2110 and 474-CCR-14-2118 which was approved by the JPSS Ground ERB on the effective day shown.
C	Jun 19, 2015	This version incorporates 474-CCR-15-2452 and 474-CCR-15-2446, which was approved by JPSS Ground ERB on the effective date shown.
D	Mar 31, 2016	This version incorporates 474-CCR-15-2480 474-CCR-15-2657, and 474-CCR-16-2814, which was approved by JPSS Ground ERB on the effective date shown

### List of TBx Items

<b>TBx</b>	<b>Type</b>	<b>ID</b>	<b>Text</b>	<b>Action</b>
None				

## Table of Contents

1	Introduction.....	1
1.1	Identification.....	2
1.2	Algorithm Overview.....	2
1.3	Document Overview.....	3
2	Related Documentation.....	4
2.1	Parent Documents.....	4
2.2	Applicable Documents.....	4
2.3	Information Documents.....	4
3	Algorithm Requirements.....	6
3.1	States and Modes.....	6
3.1.1	Normal Mode Performance.....	6
3.1.2	Graceful Degradation Mode Performance.....	8
3.2	Algorithm Functional Requirements.....	8
3.2.1	Product Production Requirements.....	8
3.2.2	Algorithm Science Requirements.....	8
3.2.3	Algorithm Exception Handling.....	10
3.3	External Interfaces.....	10
3.3.1	Inputs.....	10
3.3.2	Outputs.....	15
3.4	Science Standards.....	17
3.5	Metadata Output.....	17
3.6	Quality Flag Content Requirements.....	17
3.7	Data Quality Notification Requirements.....	17
3.8	Adaptation.....	18
3.9	Provenance Requirements.....	18
3.10	Computer Software Requirements.....	18
3.11	Software Quality Characteristics.....	18
3.12	Design and Implementation Constraints.....	18
3.13	Personnel Related Requirements.....	18
3.14	Training Requirements.....	18
3.15	Logistics Related requirements.....	18
3.16	Other Requirements.....	18
3.17	Packaging Requirements.....	19
3.18	Precedence and Criticality.....	19
4	Requirements Attributes.....	20
5	RPE_AppendixA.....	<b>Error! Bookmark not defined.</b>

**List of Figures**

Figure: 3-1 CrIS RDR/SDR Data Flows..... 11

**List of Tables**

Table: 1-1 JPSS Ground System Services ..... 2  
Table: 3-1 SV-6 Systems Resource Flow Matrix: CrIS SDR..... 11

## 1 Introduction

The Joint Polar Satellite System (JPSS) is the National Oceanic and Atmospheric Administration's (NOAA) next-generation operational Earth observation program that acquires and distributes global environmental data primarily from multiple polar-orbiting satellites. The program plays a critical role in NOAA's mission to understand and predict changes in weather, climate, oceans and coasts, and the space environment, which support the Nation's economy and protect lives and property. The first JPSS satellite mission, the Suomi National Polar-orbiting Partnership (S-NPP) satellite, successfully launched in October 2011. S-NPP, along with the legacy NOAA Polar Operational Environmental Satellites (POES), provides continuous environmental observations. Two JPSS satellites will follow S-NPP: JPSS-1, planned for launch in fiscal year (FY) 2017, with JPSS-2 to follow in FY2022.

In addition to the JPSS Program's own satellites operating in the 1330 ( $\pm 10$ ) Local Time of the Ascending Node (LTAN) orbit, NOAA also leverages mission partner assets for complete global coverage. These partner assets include the Department of Defense (DoD) Defense Meteorological Satellite Program (DMSP) operational weather satellites (in the 1730 - 1930 LTAN orbit), the European Organisation for the Exploitation of Meteorological Satellites (EUMETSAT) Meteorological Operational (Metop) satellites (in the 2130 LTAN orbit) and the Japanese Aerospace Exploration Agency (JAXA) Global Change Observation Mission-Water (GCOM-W) satellite (in the 1330 LTAN orbit). JPSS routes Metop data from McMurdo Station, Antarctica to the EUMETSAT facility in Darmstadt, Germany and EUMETSAT, in turn, provides Metop data to NOAA. For GCOM, JPSS routes the GCOM-W data from Svalbard, Norway through the NOAA Satellite Operations Facility (NSOF) in Suitland, MD, processes GCOM-W data and delivers GCOM-W products to the JPSS users who have JAXA permissions.

Additionally, the JPSS Program provides data acquisition and routing support to the DMSP and the WindSat Coriolis Program. JPSS routes DMSP data from McMurdo Station to the 557<sup>th</sup> Weather Wing at Offutt Air Force Base in Omaha, NE. After processing, the 557<sup>th</sup> releases the DMSP data for public consumption over the Internet via the National Geophysical Data Center in Boulder, CO. The JPSS Program provides data routing support to the National Science Foundation (NSF), as well as the National Aeronautics and Space Administration (NASA) Space Communications and Navigation (SCaN)-supported missions, which include the Earth Observing System (EOS). As part of the agreements for the use of McMurdo Station, JPSS provides communications/network services for the NSF between McMurdo Station, Antarctica and Centennial, Colorado.

As a multi-mission ground infrastructure, the JPSS Ground System supports the heterogeneous constellation of the before-mentioned polar-orbiting satellites both within and outside the JPSS Program through a comprehensive set of services as listed in Table 1-1.

**Table: 1-1 JPSS Ground System Services**

Service	Description
Enterprise Management and Ground Operations	Provides mission management, mission operations, ground operations, contingency management and system sustainment
Flight Operations	Provides launch support and early orbit operations, telemetry and commanding, orbital operations, mission data playback, payload support, flight software upgrade, flight vehicle simulation, and disposal at the end of mission life
Data Acquisition	Provides space/ground communications for acquiring mission data
Data Routing	Provides routing of telemetry, mission and/or operations data through JPSS' global data network
Data Product Generation	Provides the processing of mission data to generate and distribute raw, sensor, environmental, and ancillary data products
Data Product Calibration and Validation	Provides calibration and validation of the data products
Field Terminal Support	Provides development and operational support to the Field Terminal customers

## 1.1 Identification

This SRS provides requirements for the CrIS (Cross-Track Infrared Sounder) Raw Data Records (RDRs) and Sensor Data Records (SDRs). CrIS is a spaceborne Fourier transform spectrometer used for atmospheric sounding at infrared wavelengths, from approximately 3.9 to 15.4 microns, in 2211 spectral channels (1305 spectral channels for S-NPP). The channels are grouped into 3 bands: short, medium, and long wavelength labeled as SWIR, MWIR, and LWIR respectively. Data are taken over a 2200 km wide swath, taken approximately 50 degrees either side of nadir, measuring top-of-atmosphere radiances. A scan is taken every 8 seconds, including an internal warm calibration measurement and a deep-space cold calibration measurement. The CrIS SDR algorithms transform the scene interferograms into fully calibrated, unapodized, spectral information. The spectra have real and imaginary parts. The CrIS field of regard (FOR) consists of a detector with an array of 3x3=9 fields of view (FOV). Each FOV subtends slightly less than 1 degree with a 1.1 degree separation between adjacent FOVs. There are 30 FORs in a single scan.

## 1.2 Algorithm Overview

The SDR Algorithm system has to mathematically retransform the scene interferograms from the CrIS instrument into spectral information useful to scientists, considering all relevant data from characterization and calibration measurements in order to yield fully calibrated spectra. All this information will enable atmospheric key parameter retrieval.

The main objectives of the SDR Algorithms are:

- Pre-process incoming data packets
  - Load and sort data
  - Convert interferograms to spectra
- Convert scene measurements into calibrated spectra
  - Compute spectral calibration, using metrology wavelength measurements
  - Characterize metrology using neon lamp reference measurements
  - Monitor metrology drift using laser diode parameters measurements

- Perform alias unfolding and spectral labeling
- Map spectral channels to a fixed wavenumber grid
- Compute radiometric calibration, using reference calibration measurements
  - Average warm calibration target data, average cold calibration target data
  - Subtract sensor background radiance
  - Remove sensor induced phase dispersion
  - Correct for fringe count errors
  - Perform non-linearity correction
  - Correct for off-axis self-apodization on each FOV
  - Correct for polarization errors
- Compute geometric calibration, using LOS direction and ephemeris data
- Evaluate the associated error
  - Check for data quality and maintain quality controls
  - Compute Noise Equivalent difference Radiance (NEdN) estimates

**1.3 Document Overview**

Section	Description
Section 1	Introduction - Provides a brief overview of the JPSS Ground System and the relevant algorithm, as reference material only.
Section 2	Related Documentation - Lists related documents and identifies them as Parent, Applicable, or Information Documents such as, MOAs, MOUs, technical implementation agreements, as well as Data Format specifications. This section also establishes an order of precedence in the event of conflict between two or more documents.
Section 3	Algorithm Requirements - Provides a summary of the science requirements for the products covered by this volume.
Appendix A	Requirements Attributes - Provides the mapping of requirements to verification methodology and attributes.

## 2 Related Documentation

The latest JPSS documents can be obtained from URL:

[https://jpssmis.gsfc.nasa.gov/frontmenu\\_dsp.cfm](https://jpssmis.gsfc.nasa.gov/frontmenu_dsp.cfm). JPSS Project documents have a document number starting with 470, 472 or 474 indicating the governing Configuration Control Board (CCB) (Program, Flight, or Ground) that has the control authority of the document.

### 2.1 Parent Documents

The following reference document(s) is (are) the Parent Document(s) from which this document has been derived. Any modification to a Parent Document will be reviewed to identify the impact upon this document. In the event of a conflict between a Parent Document and the content of this document, the JPSS Program Configuration Change Board has the final authority for conflict resolution.

Doc. No.	Document Title
470-00067	Joint Polar Satellite System (JPSS) Ground System Requirements Document (GSRD)
470-00067-02	Joint Polar Satellite System (JPSS) Ground System Requirements Document (GSRD), Volume 2 Science Product Specification
474-00448-01-01	Joint Polar Satellite System (JPSS) Algorithm Specification Volume I: Software Requirements Specification (SRS) for the Common Algorithms

### 2.2 Applicable Documents

The following document(s) is (are) the Applicable Document(s) from which this document has been derived. Any modification to an Applicable Document will be reviewed to identify the impact upon this document. In the event of conflict between an Applicable Document and the content of this document, the JPSS Program Configuration Change Board has the final authority for conflict resolution.

Doc. No.	Document Title
D0001-M01-S01-002	Joint Polar Satellite System (JPSS) Cross Track Infrared Sounder (CrIS) Sensor Data Records (SDR) Algorithm Theoretical Basis Document (ATBD)
474-00448-02-03	Joint Polar Satellite System (JPSS) Algorithm Specification Volume II: Data Dictionary for CrIS RDR/SDR
474-00448-04-03	Joint Polar Satellite System (JPSS) Algorithm Specification Volume IV: Software Requirements Specification Parameter File (SRSPF) for CrIS RDR/SDR

### 2.3 Information Documents

The following documents are referenced herein and amplify or clarify the information presented in this document. These documents are not binding on the content of this document.

Doc. No.	Document Title
474-00333	Joint Polar Satellite System (JPSS) Ground System (GS) Architecture Description Document (ADD)
474-00054	Joint Polar Satellite System (JPSS) Ground System (GS) Concept of Operations (ConOps)
470-00041	Joint Polar Satellite System (JPSS) Program Lexicon

<b>Doc. No.</b>	<b>Document Title</b>
474-00448-03-03	Joint Polar Satellite System (JPSS) Algorithm Specification Volume III: Operational Algorithm Description (OAD) for the CrIS RDR/SDR
429-05-02-42	Joint Polar Satellite System (JPSS) Mission Data Format Control Book for NPP
472-00251	Joint Polar Satellite System (JPSS) Mission Data Format Control Book for JPSS-1
472-00333	Joint Polar Satellite System-1 (JPSS-1) Cross-track Infrared Sounder (CrIS) Mission Data Packet Structures

### 3 Algorithm Requirements

#### 3.1 States and Modes

##### 3.1.1 Normal Mode Performance

SRS.01.03\_49 The CrIS SDR complex spectra algorithm shall calculate the long-wave complex spectra with an accuracy at 287 K of 0.45%.

*Rationale:* The accuracy values of the long-wave spectral radiance were flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_50 The CrIS SDR complex spectra algorithm shall calculate the complex spectra with spectral uncertainty of 10 ppm at all bands.

*Rationale:* The spectral uncertainty values were flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_51 The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with spectral resolution of at least  $2.5 \text{ cm}^{-1}$  for truncated spectral resolution, or with spectral resolution of at least  $0.625 \text{ cm}^{-1}$  for full spectral resolution.

*Rationale:* The spectral resolution limit for the short-wave band (wavenumber range in 2155-2550  $\text{cm}^{-1}$ ) was flowed down from the Level 1 and Level 2 documents. The Truncated Spectral (TS) resolution has mission effectivity of S-NPP and JPSS-1. The Full Spectral (FS) resolution has mission effectivity of S-NPP, JPSS-1 and JPSS-2.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_182 The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with a spectral resolution of at least  $1.25 \text{ cm}^{-1}$  for truncated resolution, or with spectral resolution of at least  $0.625 \text{ cm}^{-1}$  for full spectral resolution.

*Rationale:* The spectral resolution limit for the mid-wave band (wavenumber range in 1210-1750  $\text{cm}^{-1}$ ) was flowed down from the Level 1 and Level 2 documents. The TS resolution has mission effectivity of S-NPP and JPSS-1. The FS resolution has mission effectivity of S-NPP, JPSS-1 and JPSS-2.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_183 The CrIS SDR complex spectra algorithm shall calculate the long-wave complex spectra with a spectral resolution of at least  $0.625 \text{ cm}^{-1}$ .

*Rationale:* The spectral resolution limit for the long-wave band (wavenumber range in 650-1095  $\text{cm}^{-1}$ ) was flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_54 The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with a maximum Noise Equivalent difference Radiance (NEdN) specified in nedn\_sw\_specification.txt for the truncated spectral resolution of  $2.5 \text{ cm}^{-1}$ .

*Rationale:* The maximum NEdN values for the short-wave band were flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1

SRS.01.03\_472 The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with a maximum NEdN specified in nedn\_sw\_fs\_specification.txt for the full spectral resolution of  $0.625 \text{ cm}^{-1}$ .

*Rationale:* The maximum NEdN values for the short-wave band were flowed down from the Level 2 document. The CrIS Full Spectral Resolution SDR NEdN requirements allocated to the Ground Segment will be verified prior to self-apodization correction and spectral calibration.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_347 The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with a maximum NEdN specified in nedn\_mw\_specification.txt for the truncated spectral resolution of  $1.25 \text{ cm}^{-1}$ .

*Rationale:* The maximum NEdN values for the mid-wave band were flowed down from the Level 1 and Level 2 documents

*Mission Effectivity:* S-NPP, JPSS-1

SRS.01.03\_473 The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with a maximum NEdN specified in nedn\_mw\_fs\_specification.txt for the full spectral resolution of  $0.625 \text{ cm}^{-1}$ .

*Rationale:* The maximum NEdN values for the mid-wave band were flowed down from the Level 2 document. The CrIS Full Spectral Resolution SDR NEdN requirements allocated to the Ground Segment will be verified prior to self-apodization correction and spectral calibration.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_348 The CrIS SDR complex spectra algorithm shall calculate the long-wave complex spectra with a maximum NEdN specified in nedn\_lw\_specification.txt excluding the effect of the CMO matrix where the truncated resolution is the same as the full spectral resolution of  $0.625 \text{ cm}^{-1}$ .

*Rationale:* The maximum NEdN values for the long-wave band were flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_345 The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with an accuracy at 287 K of 0.58%.

*Rationale:* The accuracy values of the mid-wave band spectral radiance were flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_346 The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with an accuracy at 287 K of 0.77%.

*Rationale:* The accuracy values of the short-wave band spectral radiance were flowed down from the Level 1 and Level 2 documents.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_427 The CrIS SDR Geolocation algorithm computation shall have a 3 sigma mapping uncertainty of 5 km.

*Rationale:* This requirement is derived from L1RD requirements for Atmospheric Vertical Moisture Profile and Atmospheric Vertical Temperature Profile products.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

### **3.1.2 Graceful Degradation Mode Performance**

Not applicable.

## **3.2 Algorithm Functional Requirements**

### **3.2.1 Product Production Requirements**

Not applicable.

### **3.2.2 Algorithm Science Requirements**

SRS.01.03\_47 The CrIS SDR software shall incorporate a computing algorithm provided for the radiometrically- and spectrally-calibrated earth scene complex spectra for truncated resolution spectral bins.

*Rationale:* The earth scene complex spectra is one of the CrIS SDR products. The SDR software through its computing algorithm must produce radiometrically and spectrally calibrated earth scene CrIS SDR products in accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002). Simultaneous production and delivery of both the truncated and full spectral resolution SDRs is required in order to provide for validation of the full resolution product while avoiding impacts to existing user enterprise systems designed for the truncated product. The envisioned full transition to the full spectral resolution SDR will be dictated by OSPO based on end user readiness for accommodating that transition. The TS resolution has mission effectivity of S-NPP and JPSS-1. The FS resolution has mission effectivity of S-NPP, JPSS-1 and JPSS-2.

*Mission Effectivity:* S-NPP, JPSS-1

SRS.01.03\_474 The CrIS SDR software shall incorporate a computing algorithm provided for the radiometrically- and spectrally-calibrated earth scene complex spectra for full resolution spectral bins.

*Rationale:* In accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002). Simultaneous production and delivery of both the truncated and full spectral resolution SDRs is required in order to provide for validation of the full resolution product while avoiding impacts to existing user enterprise systems designed for the truncated product. The envisioned full transition to the full spectral resolution SDR will be dictated by OSPO based on end user readiness for accommodating that transition. The TS resolution has mission effectivity of S-NPP and JPSS-1. The FS resolution has mission effectivity of S-NPP, JPSS-1 and JPSS-2.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_52 The CrIS SDR software shall incorporate a computing algorithm provided for the noise equivalent difference radiance (NEdN) for all spectral bins.

*Rationale:* The NEDN is one CrIS SDR products. The SDR software through its computing algorithm must produce NEDN for all spectral bins in accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002).

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_56 The CrIS SDR software shall incorporate a computing algorithm provided for zero path difference amplitude and fringe count.

*Rationale:* The SDR software through its computing algorithm must compute zero path difference amplitude and fringe count for the CrIS spectro-radiometric calibration process in accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002).

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_63 The CrIS SDR software shall incorporate a computing algorithm provided for the deep space spectra symmetry, deep space spectra stability, and ICT spectra stability.

*Rationale:* The SDR software through its computing algorithm must compute deep space spectra symmetry, deep space spectra stability, and ICT (internal calibration target) spectra stability for the CrIS spectro-radiometric calibration process in accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002).

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_86 The CrIS SDR software shall incorporate a computing algorithm provided for the fringe count delay.

*Rationale:* The SDR software through its computing algorithm must compute the fringe count delay for the CrIS spectro-radiometric calibration process in accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002).

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_424 The CrIS SDR software shall incorporate a computing algorithm provided for laser wavelengths.

*Rationale:* The SDR software through its computing algorithm must compute the laser wavelengths for the CrIS spectro-radiometric calibration process in accordance with the JPSS CrIS SDR ATBD (D0001-M01-S01-002).

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

### 3.2.3 Algorithm Exception Handling

SRS.01.03\_88 The CrIS SDR software shall set the <FillField> to <FillValue> for <FillCondition> specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR><fill>.

*Rationale:* The SDR software through its computing algorithm must fill the CrIS SDR and CrIS FS SDR values based on the established fill conditions to satisfy exclusion and fill conditions.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_98 The CrIS Geolocation SDR software shall set the <FillField> to <FillValue> for <FillCondition> specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR\_GEO><fill>.

*Rationale:* The SDR software through its computing algorithm must fill the CrIS SDR Geolocation values based on the established fill conditions to satisfy exclusion and fill conditions.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

## 3.3 External Interfaces

### 3.3.1 Inputs

SRS.01.03\_87 The CrIS SDR software shall incorporate inputs specified in Table 3-1.

*Rationale:* The SDR generation software must be able to receive and process the resource interaction items shown in Table 3-1 in order to produce the intended CrIS SDR products.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_428 The CrIS SDR software shall ingest tables and coefficients formatted in accordance with Section 7 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).

*Rationale:* This defines the formats for Lookup Tables, and Processing Coefficients for input into the algorithm module.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

Table 3-1 and Figure 3-1 are best viewed together since they describe the processes governed by this SRS in different ways. The figure diagrams the data flowing into, out of, and within the code governed by this SRS. The table lists these same data interactions as well as all downstream dependencies for outputs from this SRS.

Each row in the table describes a single software interaction - data flowing from one software item to another. The data is listed in the first column. The second and third columns include the collection short name and mnemonic for the data. Blanks indicate there is no mnemonic. The fourth and fifth columns contain the SRS that generates the data product(s) in the first column, and the SRS that receives those products. The final two columns contain the actual function name in Algorithm Development Library (ADL) that produces those products, and the function that inputs those products. The SRS's titled "Ingest MSD" and "Store/Retrieve" are non-existent SRS's functioning as data handling for the IDPS. The software functions "Store Products" and "Retrieve Products" are similar non-existent functions that operate as IDPS data handling.

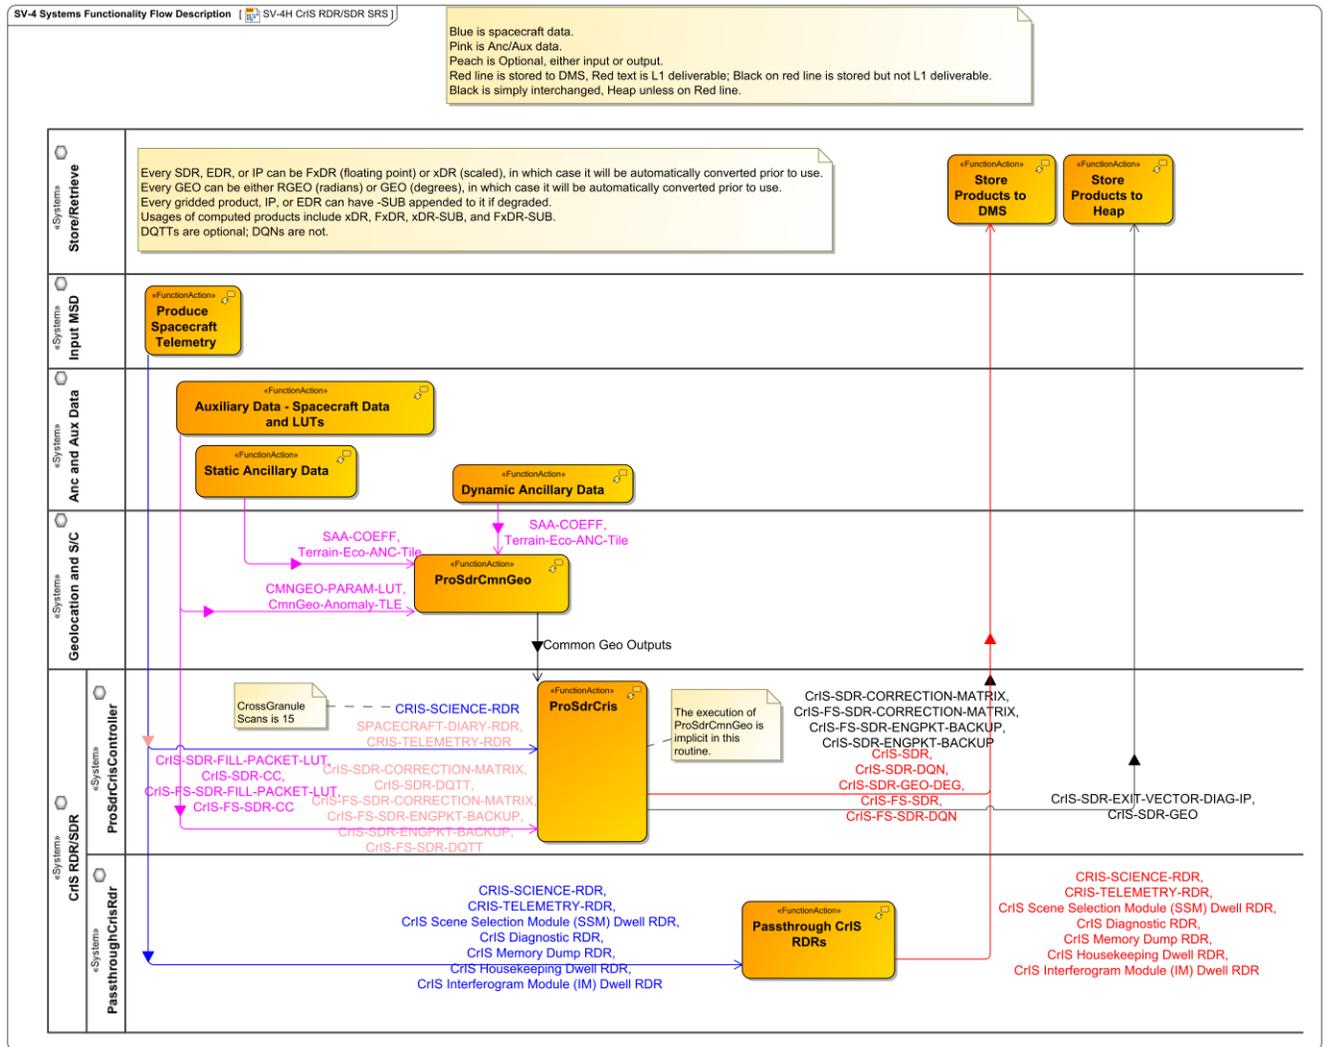


Figure: 3-1 CrIS RDR/SDR Data Flows

Table: 3-1 SV-6 Systems Resource Flow Matrix: CrIS SDR

	Data Product Name	Collection Short Name	Mnemonic	Sending SRS	Receiving SRS	Sending Function	Receiving Function
1	•SPACECR	•SPACECR	•RDRE-	Input MSD	CrIS	Produce	ProSdrCris

	<b>Data Product Name</b>	<b>Collection Short Name</b>	<b>Mnemonic</b>	<b>Sending SRS</b>	<b>Receiving SRS</b>	<b>Sending Function</b>	<b>Receiving Function</b>
	AFT-DIARY-RDR •CRIS-TELEMETRY-RDR	AFT-DIARY-RDR •CRIS-TELEMETRY-RDR	SCAE-C0030 •RDRE-CRIS-C0031		RDR/SDR	Spacecraft Telemetry	
2	•CRIS-SCIENCE-RDR •CRIS-TELEMETRY-RDR •CrIS Scene Selection Module (SSM) Dwell RDR •CrIS Diagnostic RDR •CrIS Memory Dump RDR •CrIS Housekeeping Dwell RDR •CrIS Interferogram Module (IM) Dwell RDR	•CRIS-SCIENCE-RDR •CRIS-TELEMETRY-RDR •CRIS-SSMDWELL-RDR •CRIS-DIAGNOSTIC-RDR •CRIS-DUMP-RDR •CRIS-HSKDWELL-RDR •CRIS-IMDWELL-RDR	•RDRE-CRIS-C0030 •RDRE-CRIS-C0031 •RDRE-CRIS-C0046 •RDRE-CRIS-C0032 •RDRE-CRIS-C0035 •RDRE-CRIS-C0036 •RDRE-CRIS-C0056	Input MSD	CrIS RDR/SDR	Produce Spacecraft Telemetry	Passthrough CrIS RDRs
3	•CRIS-SCIENCE-RDR	•CRIS-SCIENCE-RDR	•RDRE-CRIS-C0030	Input MSD	CrIS RDR/SDR	Produce Spacecraft Telemetry	ProSdrCris
4	•CrIS-SDR-FILL-PACKET-LUT •CrIS-SDR-CC •CrIS-FS-SDR-FILL-PACKET-LUT •CrIS-FS-	•CrIS-SDR-FILL-PACKET-LUT •CRIS-SDR-CC •CrIS-FS-SDR-FILL-PACKET-LUT •CrIS-FS-	•NP_NU-LM0230-016 •DP_NU-LM2020-001 •NP_NU-LM0230-017 •DP_NU-LM2020-	Anc and Aux Data	CrIS RDR/SDR	Auxiliary Data - Spacecraft Data and LUTs	ProSdrCris

	<b>Data Product Name</b>	<b>Collection Short Name</b>	<b>Mnemonic</b>	<b>Sending SRS</b>	<b>Receiving SRS</b>	<b>Sending Function</b>	<b>Receiving Function</b>
	SDR-CC	SDR-CC	006				
5	<ul style="list-style-type: none"> <li>•CrIS-SDR-CORRECT-ION-MATRIX</li> <li>•CrIS-SDR-DQTT</li> <li>•CrIS-FS-SDR-CORRECT-ION-MATRIX</li> <li>•CrIS-FS-SDR-ENGPKT-BACKUP</li> <li>•CrIS-SDR-ENGPKT-BACKUP</li> <li>•CrIS-FS-SDR-DQTT</li> </ul>	<ul style="list-style-type: none"> <li>•CrIS-Correct-Matrix-AUX</li> <li>•CrIS-SDR-DQTT</li> <li>•CrIS-FS-Correct-Matrix-AUX</li> <li>•CrIS-FS-SDR-ENGPKT-BACKUP-AUX</li> <li>•CrIS-SDR-ENGPKT-BACKUP-AUX</li> <li>•CrIS-FS-SDR-DQTT</li> </ul>	<ul style="list-style-type: none"> <li>•NP_NU-LM0130-000</li> <li>•DP_NU-LM2030-000</li> <li>•NP_NU-LM0130-002</li> <li>•NP_NU-LM0130-003</li> <li>•NP_NU-LM0130-001</li> <li>•DP_NU-LN2030-000</li> </ul>	Anc and Aux Data	CrIS RDR/SDR	Auxiliary Data - Spacecraft Data and LUTs	ProSdrCris
6	•Common Geo Outputs	•None	•None	Geolocation and S/C	CrIS RDR/SDR	ProSdrCmn Geo	ProSdrCris
7	<ul style="list-style-type: none"> <li>•CRIS-SCIENCE-RDR</li> <li>•CRIS-TELEMETRY-RDR</li> <li>•CrIS Scene Selection Module (SSM) Dwell RDR</li> <li>•CrIS Diagnostic RDR</li> <li>•CrIS Memory Dump RDR</li> <li>•CrIS Housekeeping Dwell</li> </ul>	<ul style="list-style-type: none"> <li>•CRIS-SCIENCE-RDR</li> <li>•CRIS-TELEMETRY-RDR</li> <li>•CRIS-SSMDWELL-RDR</li> <li>•CRIS-DIAGNOS-TIC-RDR</li> <li>•CRIS-DUMP-RDR</li> <li>•CRIS-HSKDWELL-RDR</li> <li>•CRIS-IMDWELL</li> </ul>	<ul style="list-style-type: none"> <li>•RDRE-CRIS-C0030</li> <li>•RDRE-CRIS-C0031</li> <li>•RDRE-CRIS-C0046</li> <li>•RDRE-CRIS-C0032</li> <li>•RDRE-CRIS-C0035</li> <li>•RDRE-CRIS-C0036</li> <li>•RDRE-CRIS-</li> </ul>	CrIS RDR/SDR	Store/Retrieve	Passthrough CrIS RDRs	Store Products to DMS

	<b>Data Product Name</b>	<b>Collection Short Name</b>	<b>Mnemonic</b>	<b>Sending SRS</b>	<b>Receiving SRS</b>	<b>Sending Function</b>	<b>Receiving Function</b>
	RDR •CrIS Interferogram Module (IM) Dwell RDR	-RDR	C0056				
8	•CrIS-SDR •CrIS-SDR-DQN •CrIS-SDR-GEO-DEG •CrIS-FS-SDR •CrIS-FS-SDR-DQN	•CrIS-SDR •CrIS-SDR-DQN •CRIS-SDR-GEO •CrIS-FS-SDR •CrIS-FS-SDR-DQN	•SDRE-CRIS-C0030 •DP_NU-L00510-000 •None •SDRE-CRIS-C0031 •DP_NU-L00510-000	CrIS RDR/SDR	Store/Retrieve	ProSdrCris	Store Products to DMS
9	•CrIS-SDR-EXIT-VECTOR-DIAG-IP •CrIS-SDR-GEO	•CrIS-SDR-EXIT-VECTOR-DIAG-IP •CRIS-SDR-RGEO	•None •None	CrIS RDR/SDR	Store/Retrieve	ProSdrCris	Store Products to Heap
10	•CrIS-SDR-CORRECTION-MATRIX •CrIS-FS-SDR-CORRECTION-MATRIX •CrIS-FS-SDR-ENGPKT-BACKUP-AUX •CrIS-SDR-ENGPKT-BACKUP-AUX	•CrIS-Correct-Matrix-AUX •CrIS-FS-Correct-Matrix-AUX •CrIS-FS-SDR-ENGPKT-BACKUP-AUX •CrIS-SDR-ENGPKT-BACKUP-AUX	•NP_NU-LM0130-000 •NP_NU-LM0130-002 •NP_NU-LM0130-003 •NP_NU-LM0130-001	CrIS RDR/SDR	Store/Retrieve	ProSdrCris	Store Products to DMS

### 3.3.2 Outputs

SRS.01.03\_40 The CrIS RDR software shall generate the CrIS Science RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><Science>.

*Rationale:* The Science RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_41 The CrIS RDR software shall generate the CrIS Diagnostic RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><Diagnostic>.

*Rationale:* The Diagnostic RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_42 The CrIS RDR software shall generate the CrIS Housekeeping Dwell RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><HKDwell>.

*Rationale:* The Housekeeping Dwell RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_43 The CrIS RDR software shall generate the CrIS Interferogram Module (IM) Dwell RDR , from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><InterfMod>.

*Rationale:* The Interferogram Module (IM) Dwell RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_44 The CrIS RDR software shall generate the CrIS Scene Selection Module (SSM) Dwell RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><SSMDwell>.

*Rationale:* The Interferogram Scene Selection Module (SSM) Dwell RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_45 The CrIS RDR software shall generate the CrIS Memory Dump RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><MemoryDump>.

*Rationale:* The Memory Dump RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_46 The CrIS RDR software shall generate the CrIS Telemetry RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><Telemetry>.

*Rationale:* The Telemetry RDR is one of CrIS RDR products and is generated from the specified mission data packet APIDs. APIDs associated with the Spacecraft Diary, as defined in the JPSS Algorithm Specification Vol IV: SRS Parameter File for Geolocation and Spacecraft Orientation (474-00448-04-08), are included in the deliverable RDR.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_57 The CrIS SDR software shall generate the CrIS Truncated Spectral SDR product in conformance with the XML format file in Attachment A.1 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).

*Rationale:* The product profile must conform to the XML format file. Simultaneous production and delivery of both the truncated and full spectral resolution SDRs is required in order to provide for validation of the full resolution product while avoiding impacts to existing user enterprise systems designed for the truncated product. The envisioned full transition to the full spectral resolution SDR will be determined based on end user readiness for accommodating that transition.

*Mission Effectivity:* S-NPP, JPSS-1

SRS.01.03\_491 The CrIS SDR software shall generate the CrIS Full Spectral SDR product in conformance with the XML format file in Attachment A.3 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).

*Rationale:* The product profile must conform to the XML format file. Simultaneous production and delivery of both the truncated and full spectral resolution SDRs is required in order to

provide for validation of the full resolution product while avoiding impacts to existing user enterprise systems designed for the truncated product. The envisioned full transition to the full spectral resolution SDR will be determined based on end user readiness for accommodating that transition.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_95 The CrIS SDR software shall generate the SDR geolocation product in conformance with the XML format file in Attachment A.2 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).

*Rationale:* The product profile must conform to the XML format file.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

### 3.4 Science Standards

Not applicable.

### 3.5 Metadata Output

Not applicable.

### 3.6 Quality Flag Content Requirements

SRS.01.03\_94 The CrIS SDR software shall report for each <FlagScope> quality flags using <FlagLogic> as specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR><QF>.

*Rationale:* Quality Flags for both the CrIS SDR and CrIS FS SDR must be generated based on the established flag conditions, logic, and format.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_423 The CrIS SDR geolocation software shall report for each <FlagScope> quality flags using <FlagLogic> as specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR\_GEO><QF>.

*Rationale:* Quality Flags must be generated based on the established flag conditions, logic, and format.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

### 3.7 Data Quality Notification Requirements

SRS.01.03\_62 The CrIS SDR software shall send data quality notifications to the operator according to logic specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR><Notification>.

*Rationale:* Notifications for both the CrIS SDR and CrIS FS SDR must be generated and sent based on the established logic and conditions.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

### **3.8 Adaptation**

Not applicable.

### **3.9 Provenance Requirements**

Not applicable.

### **3.10 Computer Software Requirements**

Not applicable.

### **3.11 Software Quality Characteristics**

Not applicable.

### **3.12 Design and Implementation Constraints**

SRS.01.03\_343 The JPSS Common Ground System shall execute the CrIS SDR algorithm.

*Rationale:* The CGS must incorporate algorithm changes that are supplied by the algorithm vendor. Simultaneous production and delivery of both the truncated and full spectral resolution SDRs is required in order to provide for validation of the full resolution product while avoiding impacts to existing user enterprise systems designed for the truncated product. The envisioned full transition to the full spectral resolution SDR will be determined based on end user readiness for accommodating that transition.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

SRS.01.03\_344 The JPSS Common Ground System shall execute the CrIS SDR geolocation algorithm.

*Rationale:* The CGS must incorporate algorithm changes that are supplied by the algorithm vendor.

*Mission Effectivity:* S-NPP, JPSS-1, JPSS-2

### **3.13 Personnel Related Requirements**

Not applicable.

### **3.14 Training Requirements**

Not applicable.

### **3.15 Logistics Related requirements**

Not applicable.

### **3.16 Other Requirements**

Not applicable.

### **3.17 Packaging Requirements**

Not applicable.

### **3.18 Precedence and Criticality**

Not applicable.

**Appendix A. Requirements Attributes**

The Requirements Attributes Table lists each requirement with CM-controlled attributes including requirement type, mission effectivity, requirement allocation(s), block start and end, method(s) for verifying each requirement, etc.

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
SRS.01.03_49	The CrIS SDR complex spectra algorithm shall calculate the long-wave complex spectra with an accuracy at 287 K of 0.45%.	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_50	The CrIS SDR complex spectra algorithm shall calculate the complex spectra with spectral uncertainty of 10 ppm at all bands.	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_51	The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with spectral resolution of at least 2.5 cm <sup>-1</sup> for truncated spectral resolution, or with spectral resolution of at least 0.625 cm <sup>-1</sup> for full spectral resolution.	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_182	The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with a spectral resolution of at least 1.25 cm <sup>-1</sup> for truncated resolution, or with spectral resolution of at least 0.625 cm <sup>-1</sup> for full spectral resolution.	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_183	The CrIS SDR complex spectra algorithm shall calculate the long-wave complex spectra with a spectral resolution of at least 0.625 cm <sup>-1</sup> .	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_54	The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with a maximum Noise	P	SDR	S-NPP JPSS-1	algorithm provider	2.0.0	3.0.0	Test	NA

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
	Equivalent difference Radiance (NEdN) specified in nedn_sw_specification.txt for the truncated spectral resolution of 2.5 cm <sup>-1</sup> .								
SRS.01.03_472	The CrIS SDR complex spectra algorithm shall calculate the short-wave complex spectra with a maximum NEdN specified in nedn_sw_fs_specification.txt for the full spectral resolution of 0.625 cm <sup>-1</sup> .	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_347	The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with a maximum NEdN specified in nedn_mw_specification.txt for the truncated spectral resolution of 1.25 cm <sup>-1</sup> .	P	SDR	S-NPP JPSS-1	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_473	The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with a maximum NEdN specified in nedn_mw_fs_specification.txt for the full spectral resolution of 0.625 cm <sup>-1</sup> .	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_348	The CrIS SDR complex spectra algorithm shall calculate the long-wave complex spectra with a maximum NEdN specified in nedn_lw_specification.txt excluding the effect of the CMO matrix where the truncated resolution is the same as the full spectral resolution of 0.625 cm <sup>-1</sup> .	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_345	The CrIS SDR complex spectra algorithm shall calculate the mid-wave complex spectra with an accuracy at 287 K of 0.58%.	P	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_346	The CrIS SDR complex spectra algorithm	P	SDR	S-NPP	algorithm	2.0.0	3.0.0	Test	NA

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
	shall calculate the short-wave complex spectra with an accuracy at 287 K of 0.77%.			JPSS-1 JPSS-2	provider				
SRS.01.03_427	The CrIS SDR Geolocation algorithm computation shall have a 3 sigma mapping uncertainty of 5 km.	P	GEO	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Test	NA
SRS.01.03_47	The CrIS SDR software shall incorporate a computing algorithm provided for the radiometrically- and spectrally-calibrated earth scene complex spectra for truncated resolution spectral bins.	Ap	SDR	S-NPP JPSS-1	algorithm provider	2.0.0	3.0.0	Inspection	NA
SRS.01.03_474	The CrIS SDR software shall incorporate a computing algorithm provided for the radiometrically- and spectrally-calibrated earth scene complex spectra for full resolution spectral bins.	Ap	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Inspection	NA
SRS.01.03_52	The CrIS SDR software shall incorporate a computing algorithm provided for the noise equivalent difference radiance (NEdN) for all spectral bins.	Ap	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Inspection	NA
SRS.01.03_56	The CrIS SDR software shall incorporate a computing algorithm provided for zero path difference amplitude and fringe count.	Ap	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Inspection	NA
SRS.01.03_63	The CrIS SDR software shall incorporate a computing algorithm provided for the deep space spectra symmetry, deep space spectra stability, and ICT spectra stability.	Ap	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Inspection	NA
SRS.01.03_86	The CrIS SDR software shall incorporate a computing algorithm provided for the fringe count delay.	Ap	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Inspection	NA

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
SRS.01.03_424	The CrIS SDR software shall incorporate a computing algorithm provided for laser wavelengths.	Ap	SDR	S-NPP JPSS-1 JPSS-2	algorithm provider	2.0.0	3.0.0	Inspection	NA
SRS.01.03_88	The CrIS SDR software shall set the <FillField> to <FillValue> for <FillCondition> specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR><fill>.	E	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_98	The CrIS Geolocation SDR software shall set the <FillField> to <FillValue> for <FillCondition> specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR_GEO><fill>.	E	GEO	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_87	The CrIS SDR software shall incorporate inputs specified in Table 3-1.	I	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_428	The CrIS SDR software shall ingest tables and coefficients formatted in accordance with Section 7 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).	F	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_40	The CrIS RDR software shall generate the CrIS Science RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><Science>.	F	RDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_41	The CrIS RDR software shall generate the CrIS Diagnostic RDR from mission	F	RDR	S-NPP JPSS-1	CGS	2.0.0	3.0.0	Inspection	NA

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
	data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><Diagnostic>.			JPSS-2					
SRS.01.03_42	The CrIS RDR software shall generate the CrIS Housekeeping Dwell RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><HKDwell>.	F	RDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_43	The CrIS RDR software shall generate the CrIS Interferogram Module (IM) Dwell RDR , from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><InterfMod>.	F	RDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_44	The CrIS RDR software shall generate the CrIS Scene Selection Module (SSM) Dwell RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><SSMDwell>.	F	RDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_45	The CrIS RDR software shall generate the CrIS Memory Dump RDR from mission data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><MemoryDump>.	F	RDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_46	The CrIS RDR software shall generate the CrIS Telemetry RDR from mission	F	RDR	S-NPP JPSS-1	CGS	2.0.0	3.0.0	Inspection	NA

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
	data packet APIDs specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <RDR><Telemetry>.			JPSS-2					
SRS.01.03_57	The CrIS SDR software shall generate the CrIS Truncated Spectral SDR product in conformance with the XML format file in Attachment A.1 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).	F	SDR	S-NPP JPSS-1	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_491	The CrIS SDR software shall generate the CrIS Full Spectral SDR product in conformance with the XML format file in Attachment A.3 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).	F	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_95	The CrIS SDR software shall generate the SDR geolocation product in conformance with the XML format file in Attachment A.2 of the JPSS Algorithm Specification Vol II: Data Dictionary for CrIS RDR/SDR (474-00448-02-03).	Fg	GEO	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_94	The CrIS SDR software shall report for each <FlagScope> quality flags using <FlagLogic> as specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR><QF>.	Q	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_423	The CrIS SDR geolocation software shall report for each <FlagScope> quality flags using <FlagLogic> as specified in the JPSS Algorithm Specification Vol IV:	Q	GEO	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA

Req ID	Requirement Text	Level 3 Type	Product Type	Mission Effectivity	Allocated To	Block Start	Block End	Block 2.0.0 VM	Block 2.1.0 VM
	SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR_GEO><QF>.								
SRS.01.03_62	The CrIS SDR software shall send data quality notifications to the operator according to logic specified in the JPSS Algorithm Specification Vol IV: SRSPF for CrIS RDR/SDR (474-00448-04-03) <SDR><Notification>.	N	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_343	The JPSS Common Ground System shall execute the CrIS SDR algorithm.	Ai	SDR	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA
SRS.01.03_344	The JPSS Common Ground System shall execute the CrIS SDR geolocation algorithm.	Ai	GEO	S-NPP JPSS-1 JPSS-2	CGS	2.0.0	3.0.0	Inspection	NA